



SUNSHADE RIGGING SUPPORT

RIGGING ARM / TURNBUCKLE:
 THREADED 1" Ø X 0.085" TYPE 6063-T5
 ALUMINUM

TURNBUCKLE MAXIMUM ADJUSTMENT:
 4 INCHES

UPPER AND LOWER MOUNTING
 BRACKETS: TYPE 6063-T5 ALUMINUM

SWAGE AND BOLTS:
 SERIES 300 STAINLESS STEEL
 (UNFINISHED)

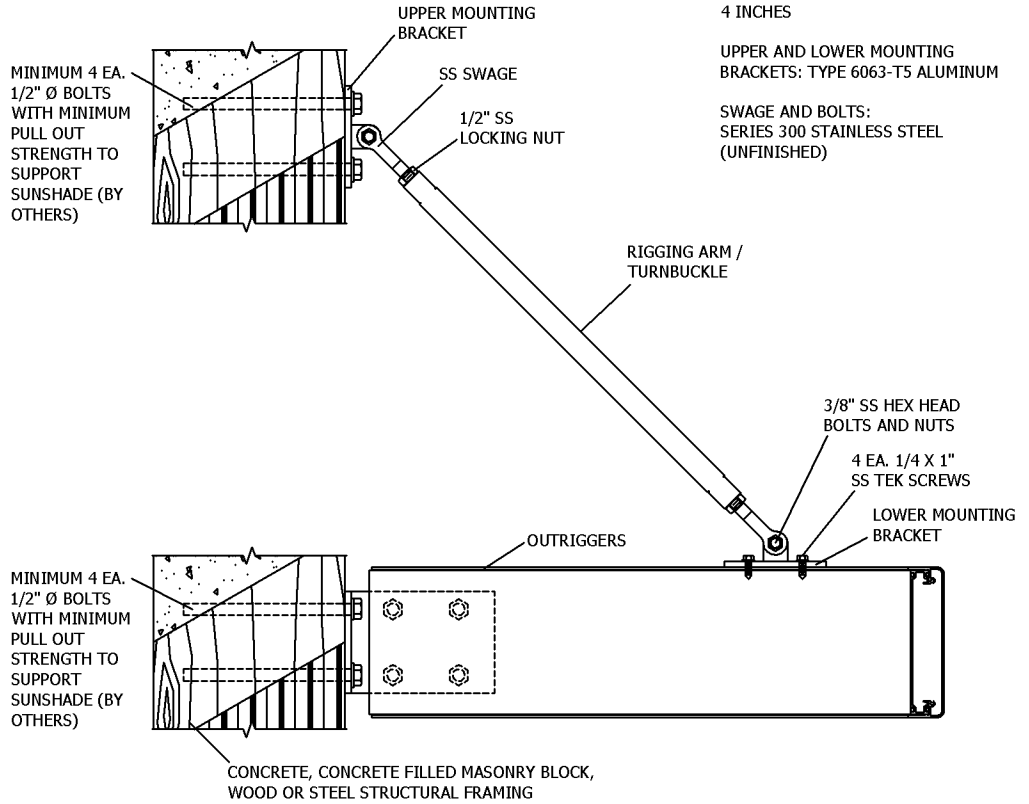


MINIMUM 4 EA.
 1/2" Ø BOLTS
 WITH MINIMUM
 PULL OUT
 STRENGTH TO
 SUPPORT
 SUNSHADE (BY
 OTHERS)

OUTRIGGERS

CONCRETE, CONCRETE FILLED MASONRY BLOCK,
 WOOD OR STEEL STRUCTURAL FRAMING

ELEVATION VIEW

SECTION VIEW

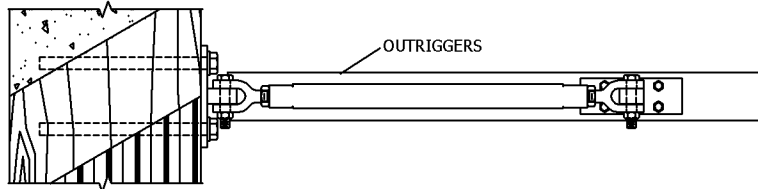

TOP VIEW

**ARCHITECTURAL
 L·O·U·V·E·R·S**

266 W Mitchell Ave - Cincinnati, OH 45232
 PH: (888) 568-8371 Fax: (888) 568-8370

PROJECT

CONTRACTOR

ARCHITECT

DRAWN BY:
 JRR

DATE:
 04/2015

DRAWING TYPE:
 TECHNICAL SHEET

DRAWING TITLE:
 RIGGING SUPPORT